

THE POSSIBILITIES ARE INFINITE



fi-5530C2

Image Scanner

High Cost Performance A3 Color Duplex Image Scanner

The fi-5530C2 is a high speed A3 color duplex scanner that can scan A4 documents at an impressive 50ppm/100ipm* in landscape (200dpi) and 35ppm/70ipm* in portrait (200dpi). It comes bundled with "ScandAll PRO" image capturing software for further improved scanning efficiency.


*Applicable for duplex scanning of A4 documents in color, at 200dpi, using JPEG compression.

A3 Scanner



- A3
- ADF
- Straight Path
- DUPLEX
- COLOR
- Ultra sonic sensor
- Ultra SCSI
- USB 2.0
- Mono. 70 A4 ipm
- Color 70 A4 ipm
- 600 dpi

- WinVista
- Win XP
- Win Server 2003
- Win 2000 Professional

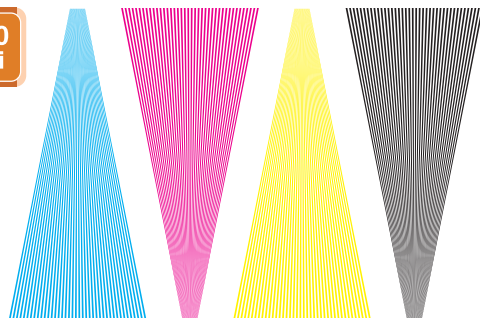

Adobe® Bundled!
Acrobat®
Standard

● Convert any document to a PDF file



● FUJITSU TWAIN Driver



for Microsoft® Windows®
Operating Systems



TECHNICAL SPECIFICATIONS

■ Excellent scanning and cost performance

The fi-5530C2's ability to scan 50 pages / 100 images per-minute in landscape (200dpi) and 35 pages / 70 images per-minute in portrait (200dpi) enables operators to quickly and efficiently digitize massive amounts of paper.

■ Includes the newest "ScandAll PRO" image capturing software

"ScandAll PRO" image capturing software is loaded with many useful scanning supporting functions.

Major features:

- High speed image display, multi-image display and thumbnail image display
- Searchable PDF, compressed PDF, password protected PDF, single page display PDF and PDF/A (ISO-19005-1)

■ Post imprinter support

The fi-5530C2 supports an imprinter option that is capable of printing dates and other information on the back (FI-553PR) of scanned documents in order to simplify the search for the original document at a later date.



Product name		FI-5530C2
Scanner type		ADF (Automatic Document Feeder)
Scanning modes		Simplex / Duplex, Color / Grayscale / Monochrome
Image sensor type		Color CCD (charge-coupled device) x 2
Light source		White cold cathode discharge lamp
Scanning range		Maximum: A3 Portrait (297 x 420mm), Double letter (11 x 17in.) Minimum: A8 Portrait (52 x 74mm)
Paper weight (Thickness)		52 to 127g/m ² (14 to 34lb) and only supports 127 g/m ² (34 lb) for A8 sheets
Scanning speed (A4 Landscape)*1	Color *2	Simplex: 50ppm (200dpi) Duplex: 100ipm (200dpi)
	Grayscale *2	
	Monochrome	
Scanning speed (A4 Portrait)*1	Color *2	Simplex: 35ppm (200dpi) Duplex: 70ipm (200dpi)
	Grayscale *2	
	Monochrome	
Paper chute capacity *3		100 sheets (A4: 80g/m ² or 20 lb) 50 sheets (A3: 80g/m ² or 20 lb) (Active loadable ADF)
Background colors		White / Black (Selectable)
Optical resolution		600dpi
Output resolution *4	Color (24 bit)	50 to 600dpi (adjustable by 1dpi increments), 1200dpi *5
	Grayscale (8 bit)	
	Monochrome (1 bit)	
Output format		Color: 24bit, Grayscale: 8bit, Monochrome: 1bit
AD converter		1024 levels (10 bit)
Interface *6		Ultra SCSI / USB2.0 (Selectable)
Connector shape		SCSI: Shield type 50pin (pin type), USB: B type
Output mode (half-tone)		Dither / Error diffusion
Voltage or voltage range		AC 100 to 240V, +10% / -10%
Power requirement		Operating: 57W or less (Sleep mode: less than 7.5W)
Operational environment		Temperature: 5 to 35°C (42 to 95°F) Relative humidity: 20 to 80% (Non-condensing)
Dimensions: Width x depth x height *7		399 x 225 x 193mm (15.7 x 8.9 x 7.6 in.)
Weight		less than 8.5kg (18.7lb)
SCSI Terminator		Built-in
Included drivers		TWAIN, ISIS™
Environmental compatibility *8		ENERGY STAR® and RoHS
Others	Multi-feed detection	Yes(Standard) ultrasonic multi-feed detection sensor
	Long paper scanning *9	863mm (34 in.)
Included items		ADF paper chute, AC cable, AC adapter, USB cable, Setup CD-ROM (TWAIN, ISIS™, ScandAll PRO), Adobe® Acrobat® CD-ROM, Getting Started, QuickScan™ Pro brochure, VRS CD-ROM

*1. Actual scanning speeds are affected by data transmission and software processing time.

*2 JPEG compressed figures.

*3 Maximum capacity varies, depending upon paper weight.

*4 Maximum output resolutions may vary, depending upon the size of the area being scanned and whether the scanner is scanning in simplex or duplex.

*5 Scanning limitations brought about by scanning mode, document size and available memory may occur when scanning at high resolutions (600dpi or higher).

*6 Ultra SCSI interface cannot be used simultaneously with USB2.0.

*7 Excluding the ADF paper chute and stacker.

*8 Pfu Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2005/95/EC).

*9 The fi-5530C2 is capable of scanning documents that exceed A3 sheets in length.

■ Options

Description	Parts number	Comments
Post Imprinter (FI-553PR)	PA03334-D401	Assists document management by printing numbers, Roman characters and codes on original documents after they have been scanned.
Image Processing Software Option V2.5	PA43402-C22901	This image processing software enables the scanner to efficiently binarize scanned data prior to transmission.

■ Consumables

Description	Parts number	Comments
Pad Assy	PA03334-0002	Lifetime: Every 100,000 sheets or one year. These rubber parts separate documents.
Pick Roller	PA03334-0001	Lifetime: Every 200,000 sheets or one year. These rollers feed documents into the scanner.
Print Cartridge	CA00050-0262	Lifetime: 4,000,000 printed characters. FI-553PR print head

As an ENERGY STAR® partner, Pfu Limited, a Fujitsu company, has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a registered trademark of the United States.



Please note that the scanning and printing of paper currency as well as stock and bond certificates is illegal.

*Microsoft, Windows, Windows Server and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.

*Adobe and Adobe Acrobat are registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.

*ISIS is a registered trademark of EMC Corporation of the United States.

*Any other products or company names appearing in this document are the trademarks or registered trademarks of the respective companies.

*Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition July 2007.

Japan contact

PFU LIMITED

International Sales Dept., Imaging Business Div.
Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,
Kawasaki-city, Kanagawa 212-8563, Japan
Phone: (81-44) 540-4668 Fax: (81-44) 540-4639
<http://imagescanner.fujitsu.com/>

XXXXXXXX contact

FUJITSU XXX XXX
XXX XXX XXX XXX
XXX XXX XXX XXX
XXX XXX XXX XXX
XXX XXX XXX XXX
Phone: (1-23) 456-7890 Fax: 123-456
<http://www.XXX.com/>